

# Ready for the challenge



Matador, the brand with a long tradition is coming with a new generation of truck tyres. The new HR 4 offers **increased mileage** and **reduced fuel consumption**. Ideal for today's demanding regional and highway transportation.

**NEW  
GENERATION**



**F HR 4**

**m+s**

LONG-DISTANCE AND REGIONAL TRANSPORT

- High mileage
- Improved wet performance
- Better driving control



**D HR 4**

**m+s**



LONG-DISTANCE AND REGIONAL TRANSPORT

- High mileage
- Impressive traction
- Higher durability



**T HR 4**

**m+s**


LONG-DISTANCE AND REGIONAL TRANSPORT

- High mileage
- Improved rolling resistance
- Better durability

# Technical specification and regrooving recommendation:

Size	Tread pattern	Operational parameters					EU tyre label				Regrooving			Rim		Tyre size (mm)						Load per axle (kg) at tyre pressure (kPa)					
		L/S1	Speed index and ret. speed (km/h)	PR	T1/TL	M+S mark	Fuel efficiency	Wet grip	Ext. rolling noise	Noise grade	Depth (mm)	Width (mm)	No.	Rim width	Axial distance	Maximum operating size		New tyre		Static radius $\pm 1.5\%$	Effective rolling circumference $\pm 2\%$	L1	Single/Dual	750	800	850	900
																$\uparrow$	$\emptyset$	$\pm 1\%$	$\pm 1\%$								
<b>17.5"</b>																											
215/75 R 17.5	FHR4*	126/124 M	M 130	12	TL	M+S	**	**	**	**	3.0	10	F1	6.00 6.75	239 246	220 228	779	212 219	767	359	2.339	135 126 133 124	S S D D	3.940 7.450	4.150 7.845	4.360 8.240	
	DHR4*	126/124 M	M 130	12	TL	M+S	**	**	**	**	3.0	7	D1														
	THR4*	135/133 K	K 110	16	TL	M+S	**	**	**	**	3.0	10	T1														
235/75 R 17.5	THR4*	143/141 K (144/144 F)	K 110 (F 80)	16	TL	M+S	**	**	**	**	3.0	10	T1	6.75 7.50	262 271	242 251	811	233 241	797	372	2.431	144 143 144 141	S S D D	4.835 9.710 9.675 8.900	5.095 9.955 10.190 9.370	5.345 5.205 10.695 9.835	5.600 5.450 11.200 10.300
	FHR4	136/134 M	M 130	16	TL		D	B	70	1	2.0	7	T3	6.75 7.50	270 279	250 258	803	240 248	789	364	2.406	146 143 136 146	S S S D	4.965 4.710 4.050 9.930	5.225 4.955 4.265 10.455	5.485 5.205 4.480 10.975	5.745 5.450 4.880 11.490
	THR4*	143/141 L (146/146 F)	L 120 (F 80)	16	TL	M+S	**	**	**	**	3.0	10	T1														
205/65 R 17.5	THR4	127/125 J (127/127 F)	J 100 (F 80)	14	TL	M+S	D	C	69	1	2.0	6	T3	6.00 6.75	231 239	213 221	721	204 213	711	332	2.155	137 127 125	S S D	3.020 6.045 5.700	3.185 6.685 6.005	3.340 7.000 6.300	3.500 7.000 6.600
	FHR4	136/134 M	M 130	16	TL		D	B	70	1	2.0	7	T3														
<b>19.5"</b>																											
245/70 R 19.5	THR4	141/140 J	J 100	16	TL	M+S	C	C	70	1	3.0	7	T2	6.75 7.50	270 279	250 258	853	240 248	839	389	2.559	141 140	S S	4.655 9.045	4.905 9.525	5.150 10.000	
285/70 R 19.5	THR4	150/147 J	J 100	16	TL	M+S	C	C	70	1	3.0	7	T2	7.50 8.25 9.00	311 318 327	287 294 303	911	276 283 291	895	413	2.730	150 157	S D	5.790 10.630	6.095 11.190	6.400 11.750	6.700 12.300
445/45 R 19.5	THR4	160/-J	J 100	22	TL	M+S	B	C	72	2	2.5			14.00 15.00		453 464	911	436 446	895	415	2.712	160	S	7.775	8.190	8.595	9.000
<b>22.5"</b>																											
295/80 R 22.5	FHR4*	154/149 M	M 130	16	TL	M+S	**	**	**	**	3.0	10	F1	8.25 9.00	326 335	302 310	1.062	290 298	1.044	487	3.184	154 152 149	S S D	6.785 6.420 11.760	7.140 6.760 12.380	7.500 7.100 13.000	
	DHR4*	152/148 M	M 130	16	TL	M+S	**	**	**	**	3.0	7	D1														
315/80 R 22.5	FHR4	156/150 L (154/150 M)	L 120 (M 130)	20	TL	M+S	C	B	69	1	3.0	10	F1	9.00 9.75	351 360	318 326	1.096	312 320	1.076	500	3.282	156 154	S S	6.910 6.785	7.280 7.140	7.640 7.500	8.000
	DHR4	156/150 L (154/150 M)	L 120 (M 130)	20	TL	M+S	D	C	75	2	3.0	7	D1														
315/70 R 22.5	FHR4	156/150 L (154/150 M)	L 120 (M 130)	20	TL	M+S	C	B	70	1	3.0	10	F1	9.00 9.75	351 360	318 326	1.032	312 320	1.014	468	3.093	156 154 152 150	S S S D	6.910 6.480 6.420 11.580	7.280 6.825 6.760 12.195	7.640 7.160 7.100 12.800	8.000 7.500 7.100 13.400
	DHR4	154/150 L	L 120	20	TL	M+S	D	C	74	3	3.0	7	D1														
385/65 R 22.5	FHR4*	160 K (158 L)	K 110	20	TL	M+S	**	**	**	**	3.0	10	F1	11.75 12.25		405 410	1.092	389 394	1.072	495	3.248	160 158	S S	7.775 7.690	8.190 8.095	8.595 8.500	9.000
	THR4	160/-K (158/-L)	K 110 (L120)	20	TL	M+S	B	B	70	2	3.0	10	T1														
295/60 R 22.5	FHR4	150/147 L	L 120	18	TL	M+S	C	C	70	1	3.5	9.1	T2	9.00 9.75	339 328	304 312	940	292 300	926	435	2.806	150 147	S D	5.790 10.630	6.095 11.190	6.400 11.750	6.700 12.300
	DHR4	150/147 L	L 120	18	TL	M+S	E	C	76	3	3.5	A:9 B:5	T2														
315/60 R 22.5	FHR4	152/148 L	L 120	20	TL	M+S	C	C	71	2	3.0	9	T2	9.00 9.75	344 352	318 326	966	306 313	950	445	2.879	152 148	S D	6.135 10.885	6.460 11.465	6.780 12.035	7.100 12.600
	DHR4	152/148 L	L 120	20	TL	M+S	D	C	76	2	3.0	A:9 B:5	T2														
385/55 R 22.5	FHR4*	160 K (158 L)	K 110	20	TL	M+S	C	B	71	2	3.0	10	F1	11.75 12.25		396 401	1.012	381 386	996	464	3.018	160 158	S S	7.775 7.690	8.190 8.095	8.595 8.500	9.000
	THR4	160/-K (158/-L)	K 110 (158 L)	20	TL	M+S	C	B	71	2	3.0	10	T1														

\* in preparation \*\* values in preparation

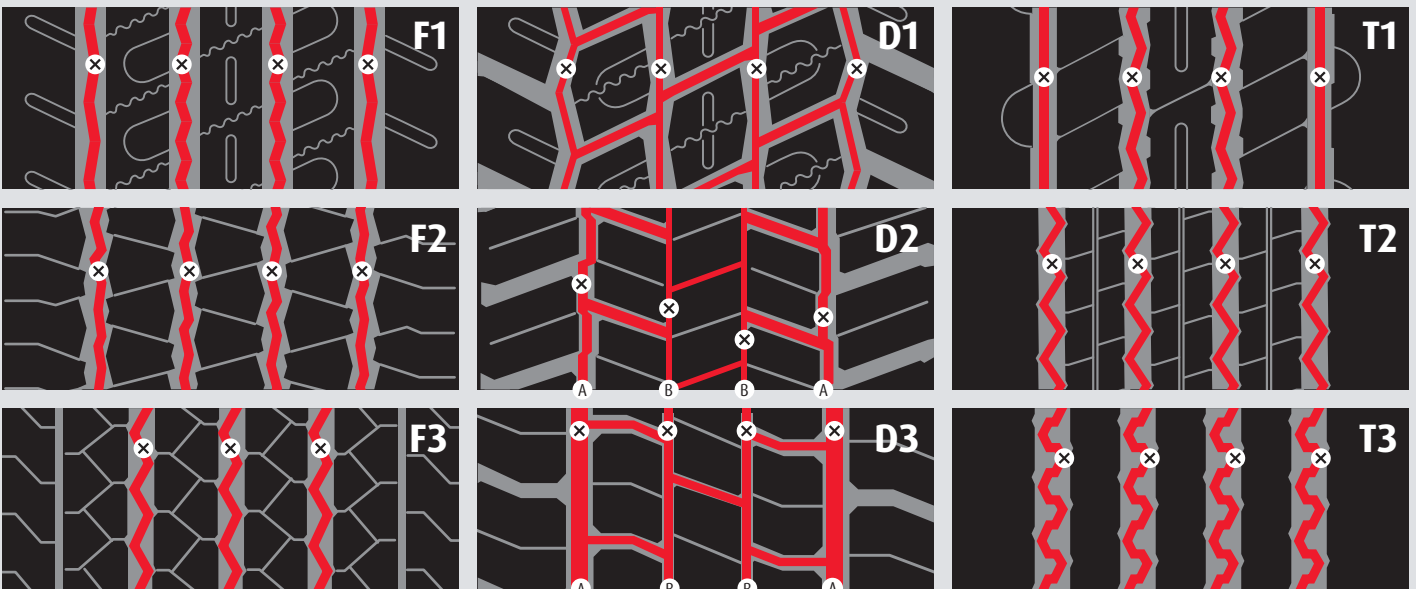

Continental Matador Rubber, s.r.o.

Terézie Vansovej 1054  
020 01 Púchov, Slovak Republic

www.matador-tyres.com

en 2017.02

Matador. A brand of Continental.

